

ORDER INFORMATION:

SPECIFICATIONS

Current rating : 1 Amps

Dielectric Withstanding : AC 500V

Contact resistance : 20 Milliohms Max.

Insulation resistance : 5000 Megohms Min.

Temperature range : - 40°C ~ + 105°C

MATERIAL :

Housing : High Temperature Thermoplastic


Terminal : Phosphor Bronze




$$\text{HFSR4} - \frac{\text{XX1}}{\text{a}} - \frac{\text{X0}}{\text{b}} - \frac{\text{X}}{\text{c}} - \frac{\text{XX}}{\text{d e}} - \frac{\text{X}}{\text{f}}$$

- a. Pin of numbers :
03 ~ 50
- b. 0 : Tin plated
1 : Gold flash
2 : 5u" Gold on Contact Area
3 : 15u" Gold on Contact Area
4 : 30u" Gold on Contact Area
5 : Duplex Gold flash on Contact Area
6 : Duplex 5u"Gold flash on Contact Area
7 : Duplex 15u"Gold flash on Contact Area
8 : Duplex 30u"Gold flash on Contact Area
9 : 10u" Gold on Contact Area
- c. Pin Length :
if you desire on other length,
by marking put desired length the A.
A= 2.3 mm (Standard)
- d. Plastic Color :
W : white
B : black
- e. Plastic material selection: f. Pack Selection :
L : L.C.P. C : Contron Pack
N : Nylon 6T. T : Tube Pack
N9 : Nylon 9T(E).


VERSION & EC DESCRIPTION


DATE	VERSION	PAGE	DESCRIPTION
2004/03/26	A	4-5	Add HFSR4 Series Plan
2004/08/12	A	4	Add Material : N1
2004/09/21	A	4-5	Revise Genal & Plan
2004/12/24	A	4	Revise Material : N1 => N9
2005/02/22	A	4	Add Pack : Contron & Tube

GENAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HFSR4-XX1-X0-X-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27mm Single Row Female Header 90°
.XXX ± 0.15	UNIT :mm		 宏揚精密有限公司 HOJAR PRECISION CO., LTD.

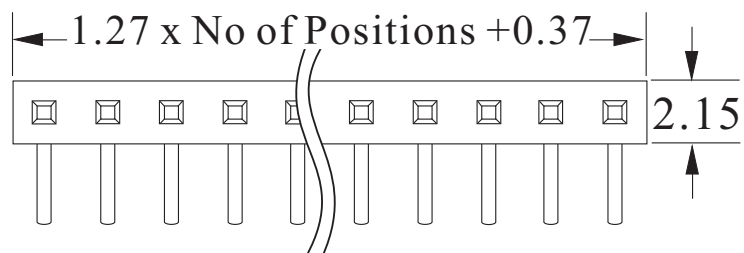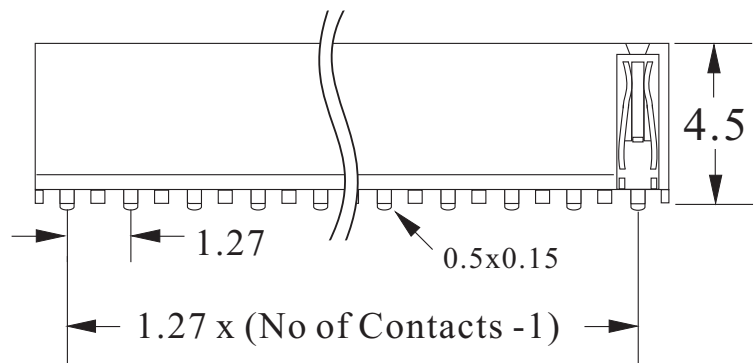

Recommended P.C.Board Hole Layout :

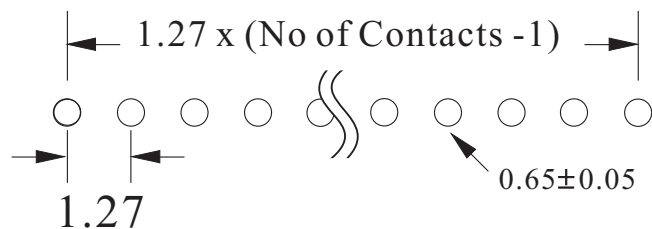

GENAL TOLERANCE	DRAW DATE	2004/03/26 H. D. LI	PART NO
X. ± 0.50	DESIGN	H. D. LI	HFSR4-XX1-X0-X-XX-X
.X ± 0.30	CHECKED	Y. M. LU	TITLE
.XX ± 0.20	APPROVED	J. F. KANG	Pitch:1.27mm Single Row Female Header 90°
.XXX ± 0.15	UNIT :mm		
			 宏揚精密有限公司 HOJAR PRECISION CO., LTD.